




K-FFU's are delivered with a G4 dust filter and an active carbon filter. The filters can be changed optionally at production and a third filter also can be added.




MOTOR INSULATION CLASS	F CLASS
MOTOR PROTECTION CLASS	IP 44
MOTOR EFFICIENCY CLASS	IE2-IE3
MOTOR ENCLOSURE TYPE	EXTERNAL ROTOR MOTOR
MOTOR BRAND	KAYI
BODY MATERIAL	GALVANIZED SHEET METAL
BODY COATING	OPTIONAL
IMPELLER MATERIAL	GALVANIZED SHEET METAL
DUTY CYCLE	IEC Duty Cycle-S1
WORKING AMBIENT TEMPERATURE	-20 - +50 °C
DIRECTIVE	IEC-60335-2-80, ISO 1940-1

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))	PRICE
K-FFU 5	230	50	85	2.722	665	73	
K-FFU 10	230	50	122	2.670	950	73	
K-FFU 20	230	50	210	2.580	1.665	75	
K-FFU 30	230	50	380	1.420	3.230	78	
K-FFU 40	230	50	690	1.365	4.655	80	

Values are for 0 Pa.


DRAWING

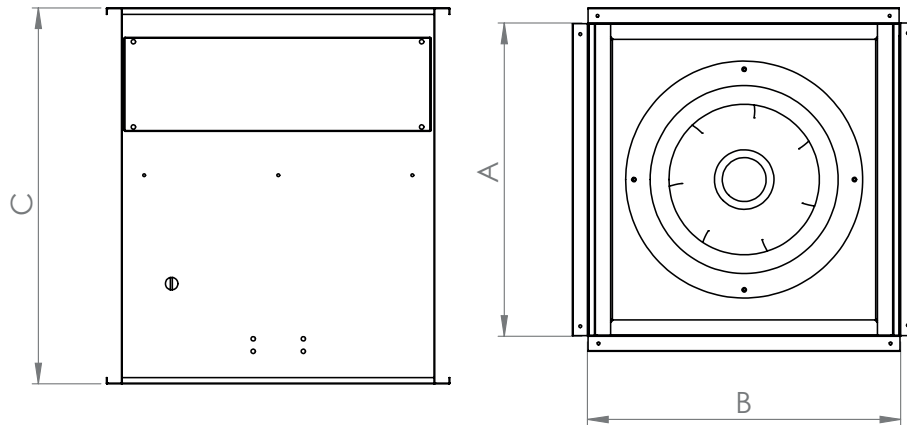


MODEL	A (mm)	B (mm)	C (mm)
K-FFU 5	300	300	500
K-FFU 10	350	350	500
K-FFU 20	400	400	500
K-FFU 30	450	450	600
K-FFU 40	500	500	600

PERFORMANCE CURVES


K-FFU 5

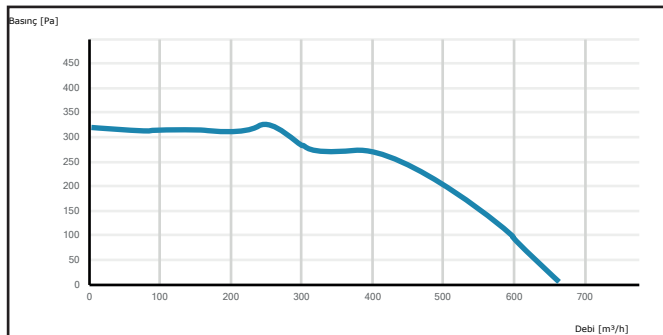


K-FFU 10

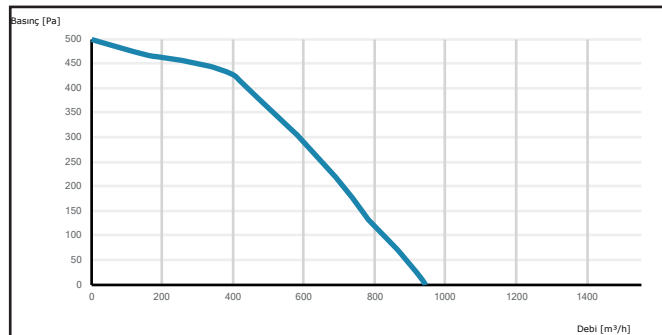

K-FFU 20

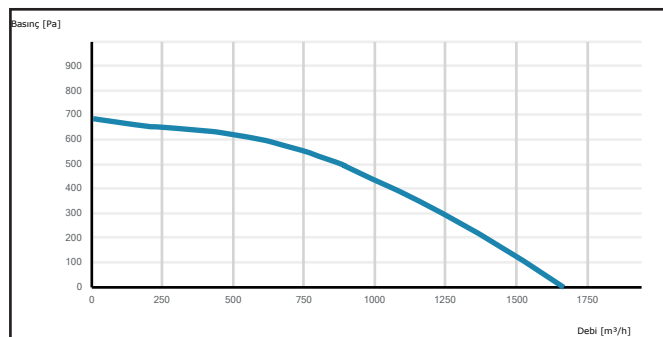

K-FFU 30

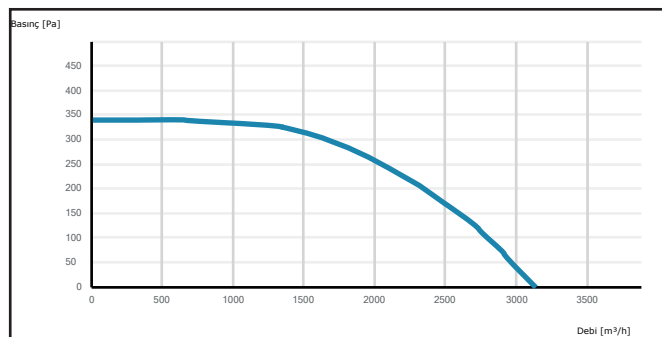

K-FFU 40

