


# K-MRAD Horizontal Discharge Centrifugal Fan With Motor Out Of Air



K-MRAD fans can be used where the air that it exhausts has particles in it that would damage the motor. Capable of carrying air up to max. 120 Celsius degree. Its single-phase motor and easy-to install body allows a simple use.




MOTOR INSULATION CLASS	F CLASS
MOTOR PROTECTION CLASS	IP 44
MOTOR EFFICIENCY CLASS	IE2-IE3
MOTOR ENCLOSURE TYPE	EXTERNAL ROTOR MOTOR
MOTOR BRAND	KAYI
BODY MATERIAL	GALVANIZED SHEET METAL
BODY COATING	ELECTROSTATIC POWDER PAINT
IMPELLER MATERIAL	GALVANIZED SHEET METAL
DUTY CYCLE	IEC Duty Cycle-S1
WORKING AMBIENT TEMPERATURE	-20 - +50 °C
DIRECTIVE	IEC-60335-2-80, ISO 1940-1

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (kW)	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))	PRICE
K-MRAD 315	230	50	0,19	2.700	1.930	63	

Values are for 0 Pa.

## DRAWING

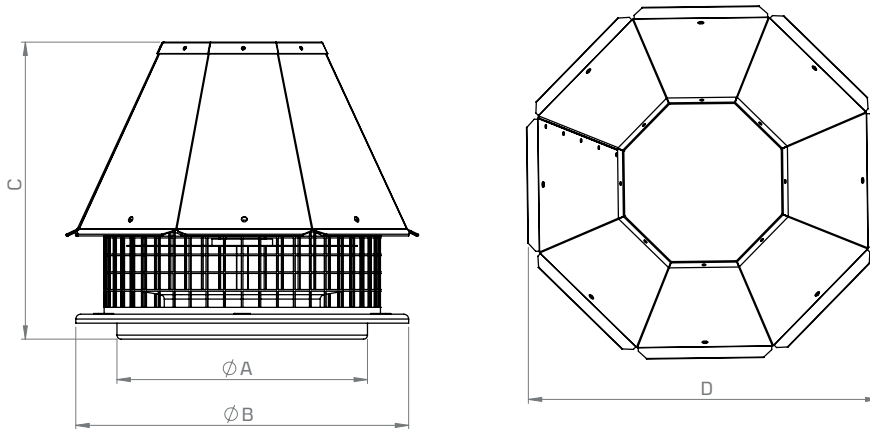

MODEL	A (mm)	B (mm)	C (mm)	D (mm)
K-MRAD 315	310	412	370	435

## PERFORMANCE CURVES

K-MRAD 315

