


K-OBR 200 Single Inlet Centrifugal Fan



K-OBR 200 fans motor out of air flow, it can be used as an ideal solution for the transfer of air at high temperatures or as a component part of the machines in multi-purpose drying, cooling, heating processes or commercial kitchen hood ventilation applications. It can be used for packaging, plastic injection, ironing machines, greenhouses, restaurant hood ventilation etc.





MOTOR INSULATION CLASS	B CLASS
MOTOR PROTECTION CLASS	IP 44
MOTOR EFFICIENCY CLASS	IE1-IE2
MOTOR ENCLOSURE TYPE	TEFC
MOTOR BRAND	KALVENT
BODY MATERIAL	SHEET METAL
BODY COATING	ELECTROSTATIC POWDER PAINT
IMPELLER MATERIAL	GALVANIZED SHEET METAL
DUTY CYCLE	IEC Duty Cycle-S1
WORKING AMBIENT TEMPERATURE	-20 +50 °C
DIRECTIVE	IEC-60335-2-80, ISO 1940-1

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))	PRICE
K-OBR 200M 2K	230	50	450	2.770	1.800	54	
K-OBR 200M 4K	230	50	190	1450	850	49	
K-OBR 200M 2K	230	50	260	2.900	1.700	54	
K-OBR 200T 2K	380	50	140	2.900	1.800	58	
K-OBR 200T 4K	380	50	190	1.465	850	54	

Values are for 0 Pa.


DRAWING

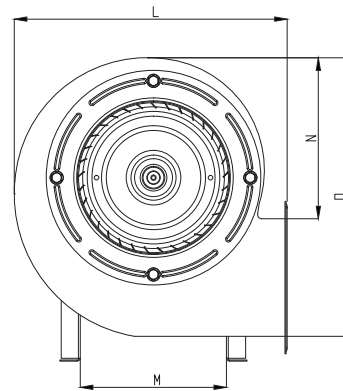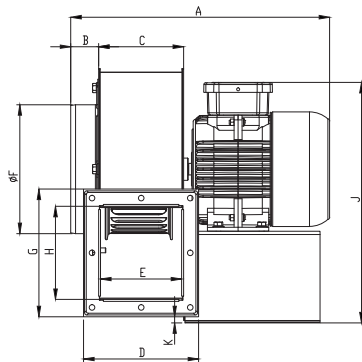


MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)	L (mm)	M (mm)	N (mm)	O (mm)
K-OBR 200	322	34	109	146	102	163	161	115	310	17	288	150	170	295

PERFORMANCE CURVES

K-OBR 200 2K

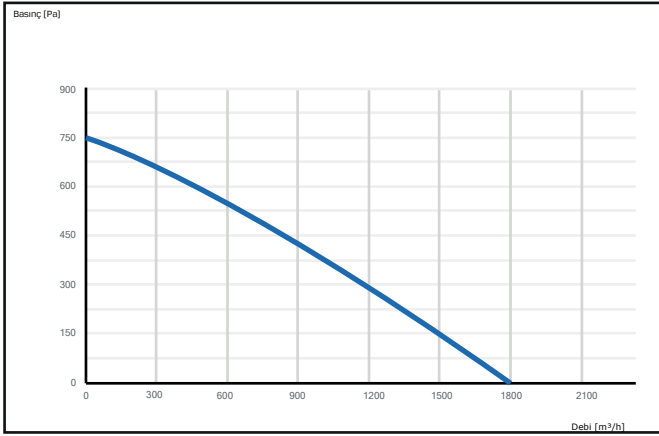

K-OBR 200 4K

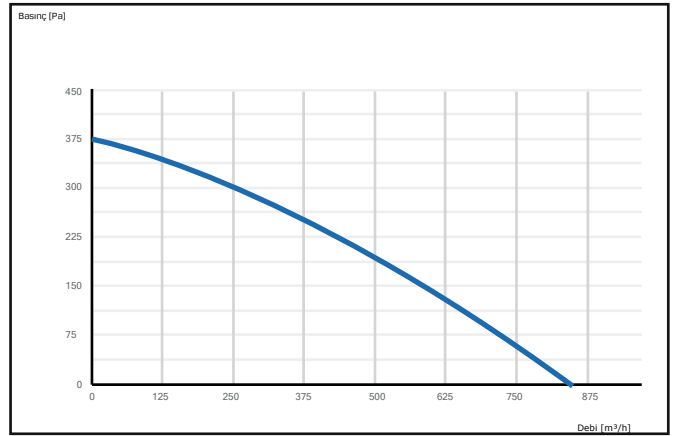

K-OBR 200 2K(Backward Curved)

