



K-EC-CRAD Roof Mounted Horizontal Discharge EC Motor Fan



K-EC-CRAD fans can be mounted on the roof. It is easy-to-install and with long-lasting motor and high efficiency impeller it can be used in green-tech projects. EC motor allows for very high efficiency rates and extreme control.





Pressure Difference Controller

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))	PRICE
K-EC-CRAD 190	230	50/60	161	4.555	974	81	
K-EC-CRAD 225	230	50/60	168	3.540	1.270	77	
K-EC-CRAD 250	230	50/60	302	3.400	1.810	75	
K-EC-CRAD 315	230	50/60	307	2.180	3.250	71	
K-EC-CRAD 355	380	50/60	770	2.400	5.590	84	
K-EC-CRAD 400	380	50/60	2.384	2.680	10.220	84	

Values are for 0 Pa.


DRAWING

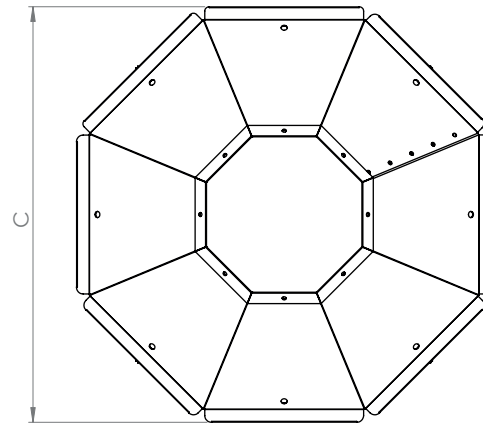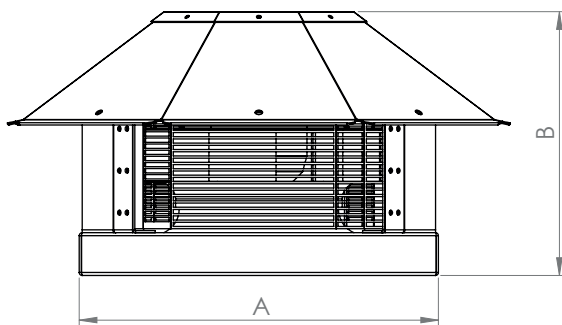


MODEL	A (mm)	B (mm)	C (mm)
K-EC-CRAD 190	250	220	340
K-EC-CRAD 225	336	247	471
K-EC-CRAD 250	355	252	500
K-EC-CRAD 315	370	256	523
K-EC-CRAD 355	450	337	640
K-EC-CRAD 400	450	367	640

PERFORMANCE CURVES


K-EC-CRAD 190

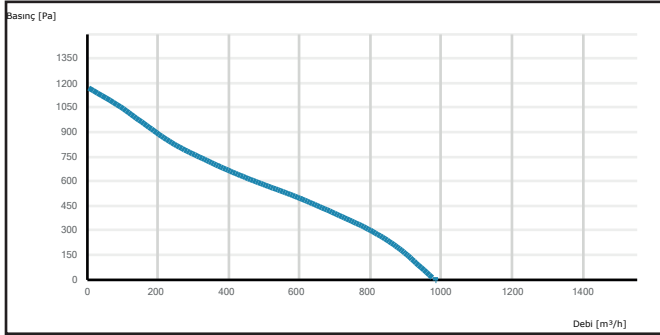


K-EC-CRAD 225

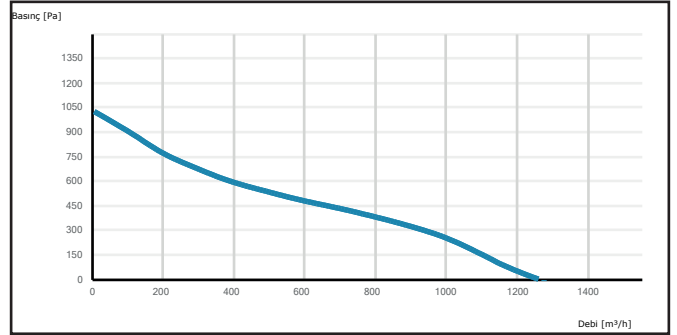


K-EC-CRAD 250

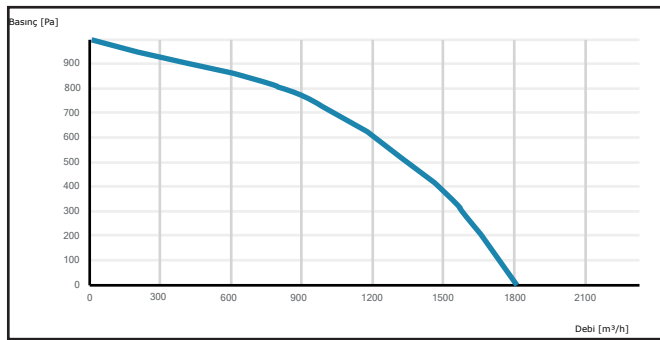

K-EC-CRAD 315

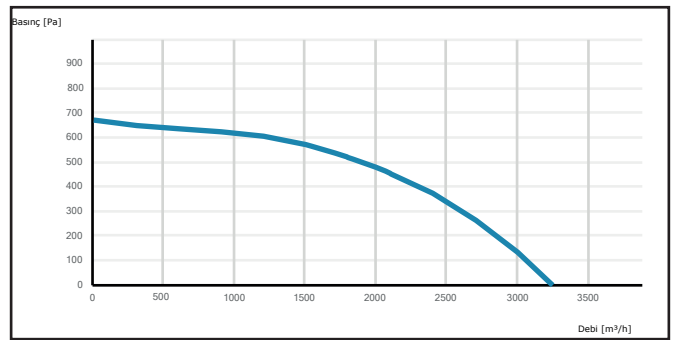

K-EC-CRAD 355

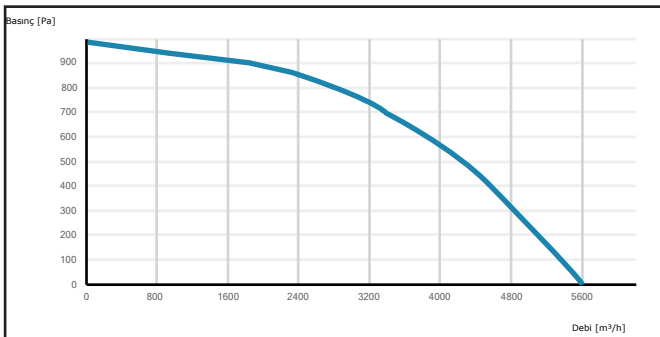

K-EC-CRAD 400

